





Version BWA 7, 9, 12 et 15

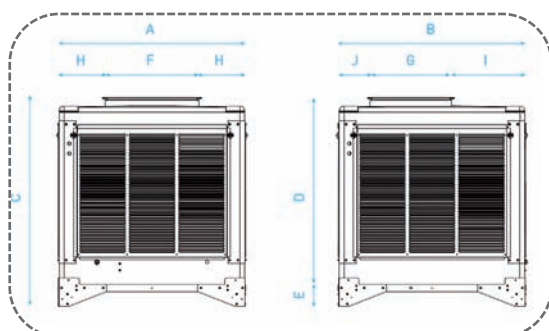

Version BWA 30, 35, 40, 55 et 70

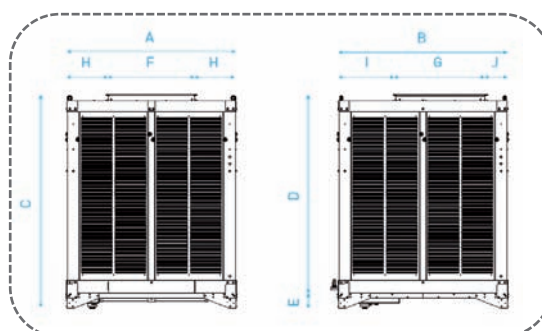


SOUFFLAGE SUPÉRIEUR

Modèles	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	Poids vide (kg)	Poids plein (kg)
BWA 07	825	855	1 105	970	135	400	345	213	325	155	90	100
BWA 09	1 135	1 135	1 270	1 135	135	560	485	288	455	195	160	180
BWA 12	1 135	1 135	1 270	1 135	135	560	485	288	455	195	170	190
BWA 15	1 135	1 135	1 270	1 135	135	560	485	288	455	195	175	195
BWA 30	1 500	1 500	1 910	1 775	136	770	795	365	505	200	370	453
BWA 35	1 500	1 500	1 910	1 775	136	770	795	365	505	200	375	458
BWA 40	1 500	1 500	1 910	1 775	136	770	795	365	505	200	415	498
BWA 55	2 185	2 185	2 150	1 790	360	890	935	647	830	420	525	720
BWA 70	2 185	2 185	2 430	2 070	360	890	935	647	830	420	680	875

SOUFFLAGE INFÉRIEUR

Modèles	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	Poids vide (kg)	Poids plein (kg)
BWA 09	1 135	1 135	1 270	1 135	135	560	485	288	455	195	155	175
BWA 12	1 135	1 135	1 270	1 135	135	560	485	288	455	195	165	185
BWA 15	1 135	1 135	1 270	1 135	135	560	485	288	455	195	170	190
BWA 30	1 500	1 500	1 860	1 724	136	770	795	365	505	200	355	438
BWA 35	1 500	1 500	1 860	1 724	136	770	795	365	505	200	360	443
BWA 40	1 500	1 500	1 860	1 724	136	770	795	365	505	200	400	483
BWA 55	2 185	2 185	2 084	1 724	360	890	935	647	830	420	515	710
BWA 70	2 185	2 185	2 360	2 000	360	890	935	647	830	420	655	850

Version BWA 7, 9, 12 et 15

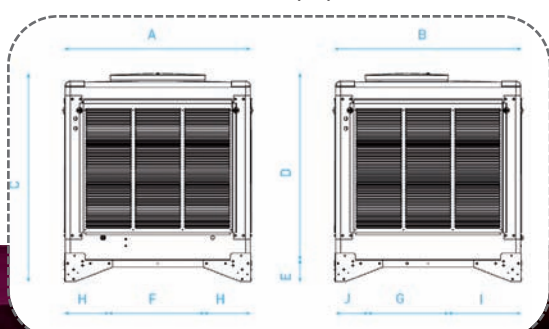

Version BWA 30, 35, 40, 55 et 70

